

## Proximity Sensor, Code : CJY18-08PA



A proximity sensor is a sensor able to detect the presence of nearby objects without any physical contact. An inductive proximity sensor is a type of non-contact electronic proximity sensor that is used to detect the position of metal objects. The sensing range of an inductive switch is dependent on the type of metal being detected. Ferrous metals, such as iron and steel, allow for a longer sensing range, while nonferrous metals, such as aluminum and copper, can reduce the sensing range by up to 60 percent. Since the output of an inductive sensor has two possible states, an inductive sensor is sometimes referred to as an inductive proximity switch.

### General Attributes

- Sensing distance : 8mm
- Hysteresis : Max. 10% of sensing distance
- Standard sensing target : 25×25×1mm ( Iron)
- Setting distance : 0~5.6mm
- Power supply : 12-24VDC (10-30VDC)
- Frequency : 350Hz
- Control output : Max. 200mA
- Indicator : Operation indicator
- Ambient temperature : -25~+70°C ( No icing)
- Storage temperature : -30~+80°C (No icing)
- Ambient humidity : 35~95%RH ( No condensation)
- Cable : φ4.8, 3P, 2m, (AWG24, Core diameter: 1mm, Number of cores: 35, Insulator diameter: φ1.25)
- Protection : IP67 (IEC Standard)

### Application Notes

Position Detection  
Speed Sensing  
Limit Switching  
Pulse Generation  
Distance Measurement  
Gear tooth detection for motion monitoring  
Valve position control during processing  
Foil seal detection inside plastic caps  
Can position detection on a beverage line

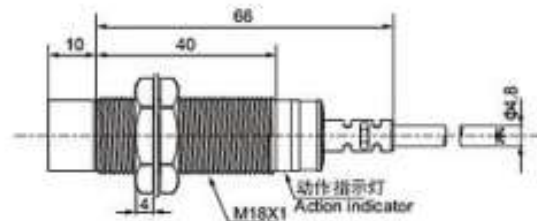

Wiring diagram

For further information please visit : <https://goo.gl/b3y7RJ>