

## **Techsense Bangladesh Ltd**

## Photoelectric sensor Code: WT9-2P430

A Photoelectric Sensor consists primarily of an Emitter for emitting light and a Receiver for receiving light. When emitted light is interrupted or reflected by the sensing object, it changes the amount of light that arrives at the Receiver. The Receiver detects this change and converts it to an electrical output. These sensors are made of light sensitive parts. This makes them useful in detecting the light emitters or any type of light source. There are various types of this sensor. Majorly they utilize the phenomena of reflection of light in which emitter and receiver together detect the reflection of light that strikes the object. In some other cases they spot any disturbance due to the target in the beam of light.

## General Attributes

■ Detection principle : Photoelectric proximity

sensor, Background suppression

■ Dimensions (WxHxD) : 12 mm x 40 mm x 22 mm

■ Housing design
■ Sensing range max.
■ Sensing range
■ Type of light
: Rectangular
: 30 mm ... 250 mm
: 30 mm ... 250 mm
: Visible red light

■ Light source : LED

■ Supply voltage : 10 V DC ... 30 V DC


■ Output type : PNP

■ Connection typeI Male connector M12, 4-pinI Plastic, ABS, Plastic, PMMA

■ Ambient operating temp.: –40 °C ... +60 °C ■ Ambient storage temp.: –40 °C ... +75 °C

## **Application Notes**

Detects Presence of Transparent Films Detects Transparent Bottles Warning Alarm For Bottles Validation of cigarette Paper Prevention of entry into restricted area

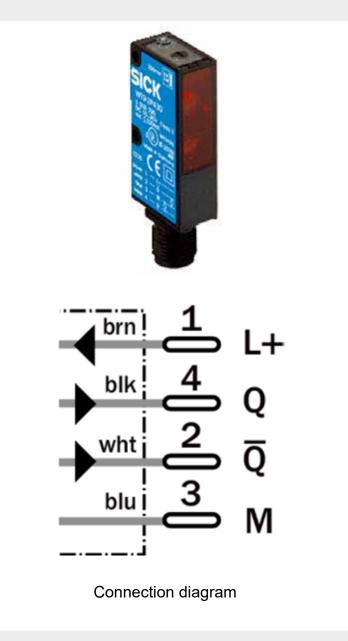

For further information please visit: https://goo.gl/5Ngn73

