

Techsense Bangladesh Ltd

Inductive Global Sensors, Code- BES007C

Balluff's inductive Global sensors for object detection in metal areas are robust and reliable. With a wide range of over 500 variants, we offer the right inductive sensor for every application. The technology, which is in use worldwide, has an optimum price/performance ratio and can also be delivered in large quantities in a short amount of time.


General Attributes

- Dimension : Ø 18 x 56 mm
- Connection type : Cable, 3.00 m, PVC
- Operating voltage U_b : 12...30 VDC
- Switching frequency : 700 Hz
- Sensing Range : 5 mm
- Switching output : NPN
- Ambient temperature : -25...70 °C
- Housing style : M18x1
- Housing material : Brass
- Installation : for flush mounting
- Polarity reversal protected : yes
- IP rating per IEC 60529 : IP68
- Approval/Conformity : CE, cULus, EAC




Application Notes

Position Detection
 Speed Sensing
 Limit Switching
 Pulse Generation
 Distance Measurement
 And Many More.

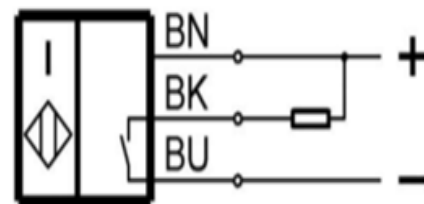

Wiring Diagram

For further information please visit : <https://goo.gl/n5hB7n>



We are the authorized distributor of Balluff in Bangladesh.