

## Single-ended Cordsets, Code- BCC032Z

In our comprehensive product range of single-ended cordsets for every industry, you are guaranteed to find the right connection for your application. Signals, data and power are always reliably transmitted. Different cable types and plug connectors expand your flexibility in the choice of the right single-ended cordsets. The most important benefits that you will get are large selection for every industry, various cable types, various plug connectors, robust and industrial grade.


### General Attributes

- Cable temperature, drag chain : -25...60 °C
- Conductor cross-section : 0.34 mm<sup>2</sup>
- Connector configuration : angled
- Number of conductors : 4
- Operating voltage max. DC 01 : 250.0 V
- Cable temperature, fixed routing : -50...90 °C
- Cable : PUR black, 5.00 m, Drag chain compatible
- Cable diameter D : 4.70 mm ±0.20 mm
- Cable temperature, flexible routing : -25...90 °C
- Connection : M12x1-Female, 5-pole, A-coded
- Approval/Conformity : cULus LISTED



### Application Notes

- Conveyors
- Pneumatic/hydraulic valves
- Packaging and food processing equipment
- Material handling systems
- Transfer and assembly lines
- Pick-n-place machines
- Robotic End-of-arm tooling
- Gear tooth sensing
- Mixers, grinders and choppers
- Pumps
- Industrial saws
- Diverters on conveyor lines
- Wire consolidation

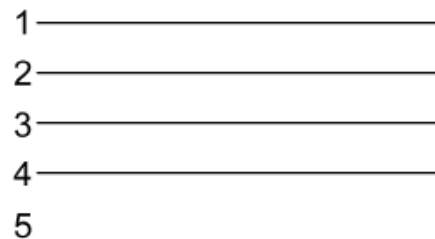

**Wiring Diagram**

For further information please visit : <https://goo.gl/R3B4f7>