

Submersible Level Transmitter Code : SL7500


SL75 series standard level transmitter design with consummate encapsulation technology, the perfect assembly process insure the quality and performance of this series with high stability, high accuracy, leakage proof.

General Attributes

- Pressure range : 0 ~ 1mH₂O~100mH₂O
- Range : 0 - 1000m
- Overload : 150%FS
- Output : 4-20mA, 0-5V, 0.5-4.5V
- Power supply : 12-36VDC
- Combine error : 0.25%FS; 0.5% FSO
(Including Linearity, Repeatability & Hysteresis)
- Accuracy : ±0.25% of F.S
- Long term stability : ± 0.2%FS/year
- Repeatability : ±0.2%FSO
- Response time : <10ms
- Pressure connection : screw thread , throw-in type
- Temp. compensation : 0°C~65°C
- Operating temp. : -20°C~85°C
- Protection grade : IP68

Application Notes

Distance measurement
Object detection
Indicate the position of objects and materials.
Determine the dimensions of objects such as height, width and diameter.
level control for caustic liquids
Roll diameter, tension contro

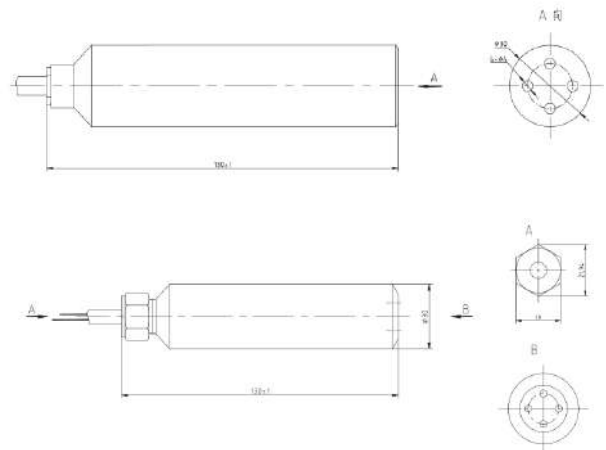

Dimensions

For further information please visit : <https://goo.gl/H8YiGg>

We are the authorized distributor of OMICRON in Bangladesh.