


## BIMETAL SCREW-IN THERMOMETER

Code: BI-006-FB

Our bimetal pointer thermometer impresses with its clean processing. The display range from 0 ° C to 120 ° C gives it a wide and versatile range of applications in the industrial and private sectors. The housing is made entirely of galvanized sheet steel and is completed with a Polystrol viewing window. The immersion sleeve has a G1 / 2 "screw thread and a 32.5mm installation length. The dial itself is made of ABS white and fits seamlessly with its raised edge to the housing. Also this product is like all our bimetallic thermometer Made in Germany!

### General Attributes

- |                       |  |
|-----------------------|--|
| ■ Casing              | : Galvanized steel sheet   |
| ■ Dial                | : ABS knows  |
| ■ Window              | : Polystyrene / instrument flat glass                                      |
| ■ Thermowell          | : G1 / 2 ", dipping Ø 9 mm, immersion sleeve MS Ø 12 mm outside, removable |
| ■ operating pressure  | : Max. 6 bar   |
| ■ display area        | : 0 ° C ... + 120 ° C  |
| ■ measuring element   | : bimetal coil   |
| ■ accuracy            | : Class 2 (DIN 16203 / DIN EN 13190)                                       |
| ■ installation length | : 40mm   |

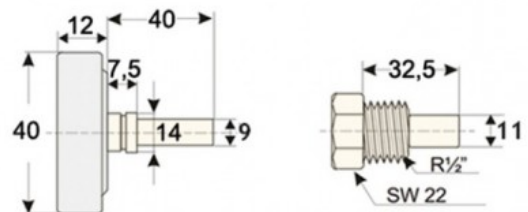


Wiring Diagram

### Application Notes

- heater
- Sanitary
- process engineering
- Solar

For further information please visit : <https://goo.gl/GdSXZZ>



we are the Authorized distributor Titec of in Bangladesh