


In Line Solenoid Valve , Code- 9069024

SOV L solenoid valves belong to the LINE ON LINE® family, which means they can be connected to all the other components in series or in parallel. Available in the version for pipe-pipe connection with two push-in fittings, and in the version for thread-pipe connection with a brass nickel-plated male thread and a push-in fitting. Though small in size, SOV L valves are solenoid-piloted and feature very high performance. The spool distributor is fitted with special polyurethane gaskets to ensure a very long working life. Each valve comes complete with a monostable manual control and LED. Exhaust can be damped with an annular silencer or conveyed via a pipe fitting. The fitting for conveyed exhaust can be oriented freely.

GENERAL ATTRIBUTES

| | |
|--------|--------------------|
| ■ Ref. | : SOV L 3/2 NC 8-8 |
| ■ Ø | : 8 |
| ■ A | : 57.3 |
| ■ B | : 63.5 |
| ■ C | : 18.7 |
| ■ D | : 9.1 |
| ■ E | : 13.8 |
| ■ I | : 18.7 |
| ■ I1 | : 24 |

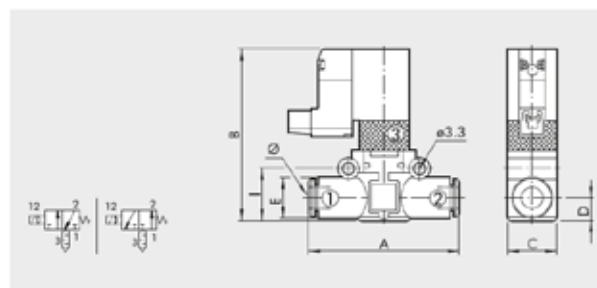


Wiring Diagram

TECHNICAL DATA

| | |
|---|--|
| □ Operating pressure MPa | : 0.25 - 0.7 |
| □ bar | : 2.5 - 7 |
| □ psi | : 36 - 101 |
| □ Temperature range °C | : -10 to +60 |
| □ Flow rate at 6.3 bar ΔP 0.5bar NI/min | : 500 |
| □ Voltage | : 24 VDC |
| □ Power | : 0.9 |
| □ Fluid | : Lubricated or unlubricated filtered compressed air |

For further information please visit : <https://goo.gl/TPYAnf>

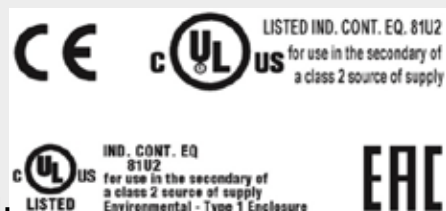

We are the authorized distributor of Metal Work in Bangladesh.