

# Techsense Bangladesh Ltd

## MI Bare Insert RTD Code : RTD010


RTD009 Used as a spare or replacement RTD element in existing RTD assembly.

### General Attributes

- Type : MI Bare Insert
- Wetted Parts : SS316
- Minimum OD : 1mm
- Maximum OD : 10mm
- Connection : NIL
- Wire / Connector : Copper
- Range : F -200°C to 449°C  
C 450°C till 600°C
- Sheath Diameter : 3mm 3mm Diameter  
6mm 6mm Diameter  
8mm 8mm Diameter

### Application Notes

Air, gas and liquid temperature measurement  
 Exhaust gas temperature measurement  
 Steel industry, Gas appliance safety  
 For different industries like plastic, pharmaceutical, food.  
 Thermocouple are used for measuring the intensity of incident radiation  
 Thermocouple embedded in Dalton cartridge heat.

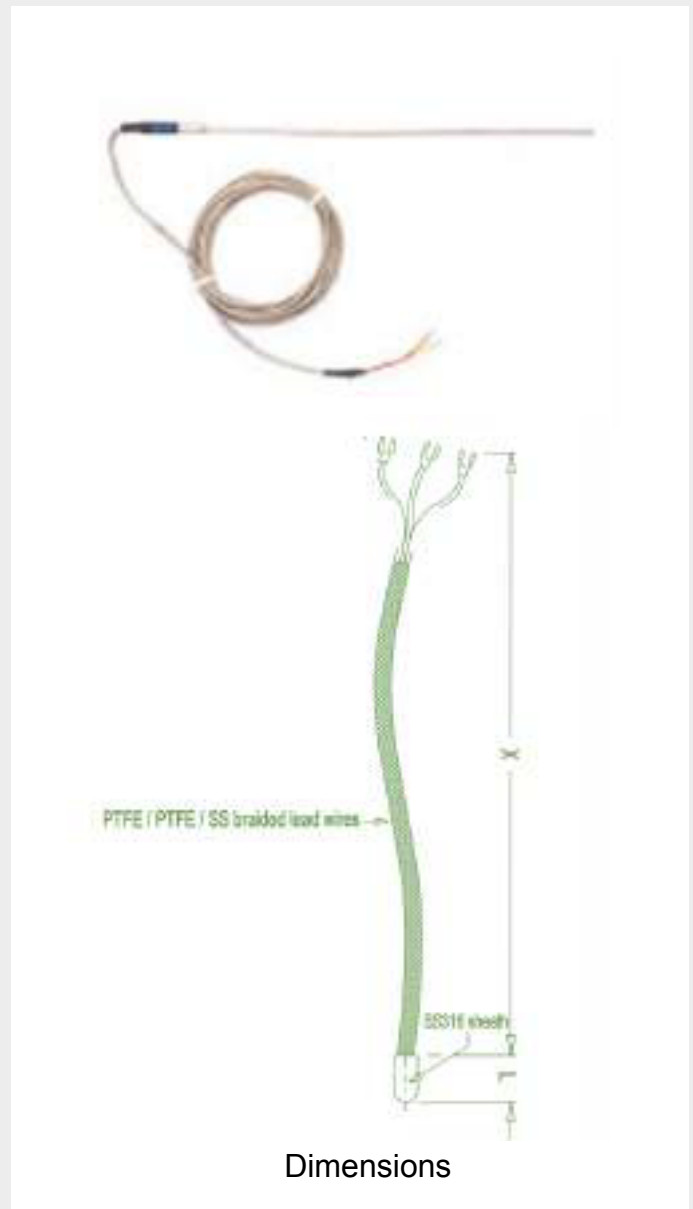

Dimensions

For further information please visit : <https://goo.gl/6VvNnF>



We are the authorized distributor of OMICRON in Bangladesh.