

RTD with Protection Tube Code : RTD005


Air & flue gas service in power plant application, General industry application, Furnace temp, measurement etc.

General Attributes

■ Type	: Protection Tube
■ Wetted Parts	: Ceramic
■ Minimum OD	: 3mm
■ Maximum OD	: 10mm
■ Connection	: 1/2" - 1"
■ Wire / Connector	: Teflon
■ Range	: FLM -200°C to 449°C CMC 450°C till 600°C
■ Sheath Diameter	: 3mm 3mm Diameter 6mm 6mm Diameter 8mm 8mm Diameter

Application Notes

- Air, gas and liquid temperature measurement
- Exhaust gas temperature measurement
- Steel industry, Gas appliance safety
- For different industries like plastic, pharmaceutical, food.
- Thermocouple are used for measuring the intensity of incident radiation
- Thermocouple embedded in Dalton cartridge heat.

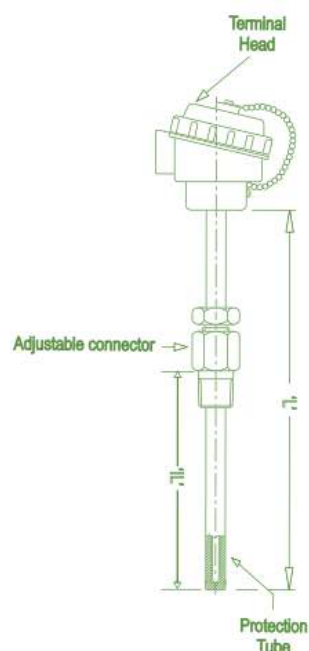

Dimensions

For further information please visit : <https://goo.gl/q2xjJi>