

Inductive Global Sensors, Code- BES006P

Balluff's inductive Global sensors for object detection in metal areas are robust and reliable. With a wide range of over 500 variants, we offer the right inductive sensor for every application. The technology, which is in use worldwide, has an optimum price/performance ratio and can also be delivered in large quantities in a short amount of time.

General information


General Attributes

■ Dimension	: Ø 18 x 56 mm
■ Connection type	: Cable, 2.00 m, PVC
■ Operating voltage Ub	: 10...30 VDC
■ Switching frequency	: 800 Hz
■ Sensing Range	: 16 mm
■ Ambient temperature	: -25...70 °C
■ Housing style	: M18x1
■ Housing material	: Brass
■ Installation	: non-flush
■ Polarity reversal protected	: yes
■ IP rating per IEC 60529	: IP67
■ Approval/Conformity	: CE, cULus, EAC



Application Notes

Position Detection
Speed Sensing
Limit Switching
Pulse Generation
Distance Measurement
And Many More.

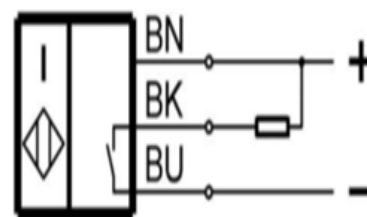

Wiring Diagram

For further information please visit : <https://goo.gl/q9OMjx>

We are the authorized distributor of Balluff in Bangladesh.