


BIMETAL SCREW-IN THERMOMETER (PLASTIC) - RED

Code: BI-003-FR

Our screw-in bi-metal pointer thermometer impresses with its flexible application range. The display range from 0 ° C to 120 ° C gives it a wide and versatile range of applications in the industrial and private sectors. The housing is made entirely of galvanized sheet steel and is completed with a Polystyrol viewing window. The dial has a G1 / 2 "screw thread and a 40mm installation length. The dial itself is made of ABS white and fits with its raised edge seamlessly to the housing. Also this product is like all our bimetallic thermometer made in Germany!

General Attributes

- Casing : red
- Dial : ABS knows
- Window : Polystyrene / instrument flat glass
- Thermowell : G1 / 2 ", dipping Ø 9 mm, immersion sleeve MS Ø 12 mm outside, removable
- operating pressure : Max. 6 bar
- display area : 0 ° C ... + 120 ° C
- measuring element : bimetal coil
- accuracy : Class 2 (DIN 16203 / DIN EN 13190)
- installation length : 40mm

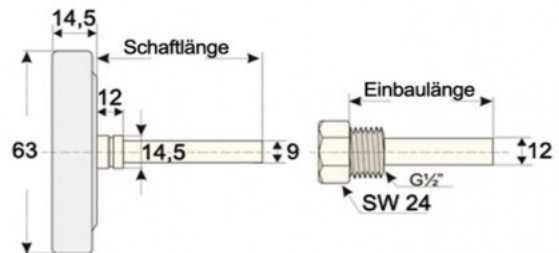


Wiring Diagram

Application Notes

- heater
- Sanitary
- process engineering

For further information please visit : <https://goo.gl/9kD2YQ>



we are the Authorized distributor Titec of in Bangladesh