

Techsense Bangladesh Ltd

Grippers With Three Parallel Jaws, Code-W1570200300

Double-acting grippers with three self-centring jaws, internal and external clamping. The body contains slots for mounting retracting magnetic sensors.


TECHNICAL DATA		P11-16	P11-20	P11-25	P11-60
Min./max. operating pressure	bar	2 to 7			
	MPa	0.2 to 0.7			
	psi	29 to 101			
Temperature range	°C	-10 to +80			
Fluid		20 µm filtered, lubricated or unlubricated air; lubrification if used, it must be continuous.			
Bore	mm	16	20	25	60
Single jaw stroke	mm	3	4	5	12.5
Clamping force at 6.3 bar 22 mm from the top surface, during opening and closing N		38	62	110	900
Weight	kg	0.12	0.21	0.3	2.7
Maximum operating frequency	cycles/s	1.5	1.5	1.5	1.2


General Attributes

■ Type : P11-20 ■ Diameter (Bore) : 20 mm ■ Weight : 0.21 kg



DIMENSIONS OF GRIPPER P11-20

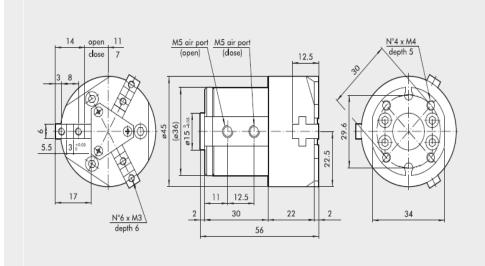



For further information please visit: https://goo.gl/wfoWWV





IND. CONT. EQ
81U2
US for use in the secondary of
a class 2 source of supply
Environmental - Type 1 Enclosure

